

PLC132 LAB 2.2: REMOTE CHASSIS USING CONTROLLOGIX ETHERNET MODULES

Student Name: _____

Student ID: _____

LAB OUTCOMES:

1. Explain the basic set-up of Ethernet communication modules
2. Explain ControlLogix setup for projects using remote chassis
3. Explain module tags on a remote chassis

LAB PROCESS:

This lesson will cover the basic set-up of a ControlLogix remote chassis, to allow a ControlLogix processor to monitor / control I/O in a chassis via Ethernet communications

Part 1

processors monitoring / controlling I/O and other devices (VFDs, HIMs) over communication networks (Remote Chassis) such as Ethernet, ControlNet, DeviceNet, DH+, Remote I/O and others. Allen Bradley ControlLogix PLC Systems can be as simple as a processor monitoring /controlling I/O across a chassis backplane (Local Chassis) or more complex with

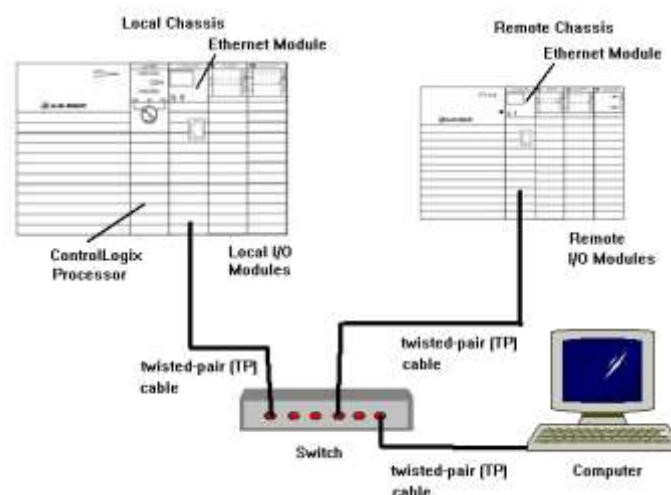


Figure 1-A
Basic Remote Chassis Configuration

Local Chassis – Chassis with ControlLogix processor, Communication Modules, Power Supply and I/O Modules (Local I/O)

Remote Chassis – Chassis with Communication Module, Power Supply and I/O Modules (Remote I/O)

Note: Remote Chassis could contain a processor

Switch – Ethernet connection point for Computer, Local Ethernet Module and Remote Ethernet Module.

Computer – Studio 5000 software, RSLinx software, Ethernet Port, Windows 7 OS
Cabling - twisted-pair

Note: Computer and the 2 Ethernet modules must have the same Network ID
Computer and the 2 Ethernet modules must have different Device (Host) IDs

2 Demo units - 1756-L71 processors version 24
1756-EN2TR or 1756-ENBT Ethernet communication modules
Discrete I/O Modules

Remote Chassis Set-up

1. Determine the IP Address and Subnet Mask information for the computer

IP Address:

Subnet Mask:

2. With RSLinx - verify that there is a connection to each of the Ethernet Modules

Note: Both Ethernet modules must have the same Network ID as the computer
Both Ethernet modules must have the same Network (Subnet) Mask as the computer

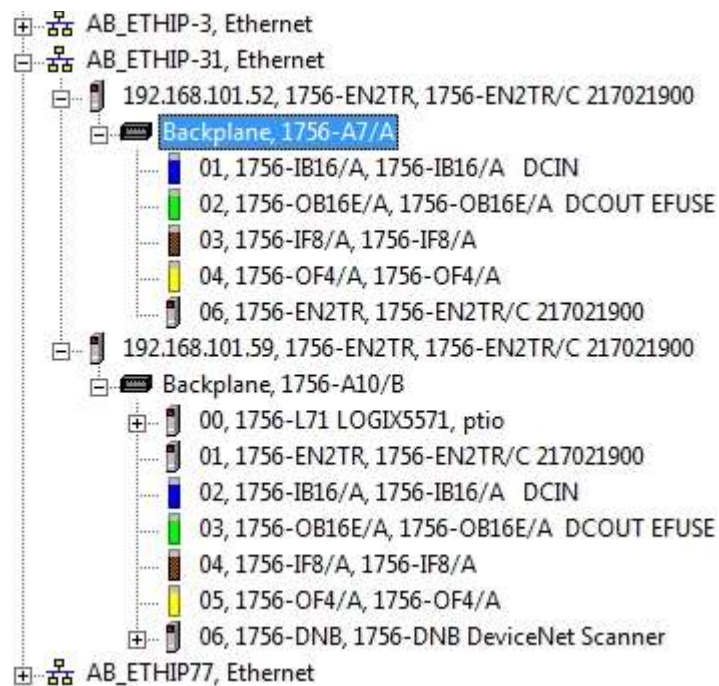


Figure 2-A - RSLinx RSWho Screen
Ethernet Connection

In this example the chassis that contain the 1756-EN2TR module with the IP address of 192.168.101.59 is the local chassis.
1756-L71 processor located in slot 0.

In this example the chassis that contain the 1756-EN2TR module with the IP address of 192.168.101.52 is the remote chassis. No ControlLogix processor in chassis.

3. Using the Project File Module_2_Remote_Chassis.L5K, Import in to Studio 5000.

4. Navigate to and expand the I/O Configuration folder.

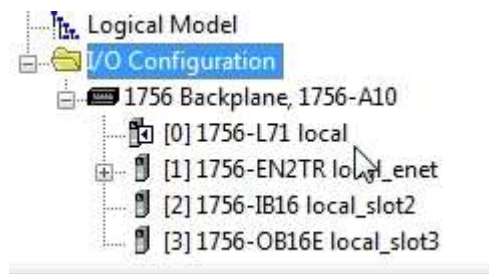


Figure 3-A
I/ O Configuration Folder

5. Open the Properties window for the 1756-EN2TR Ethernet module.

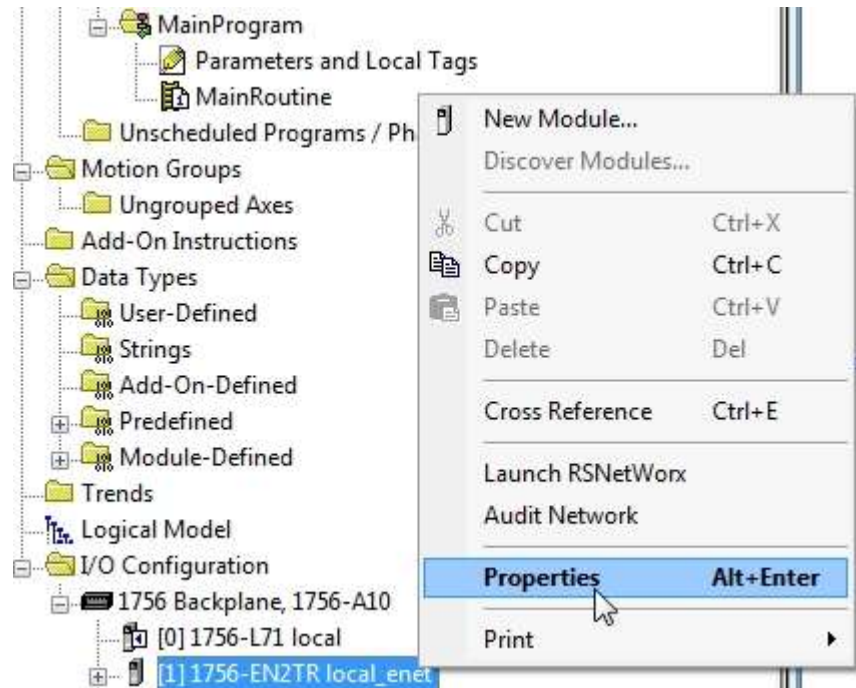


Figure 4-A
Navigate to 1756-EN2TR Properties

6. View General tab Information

See Figure 5-A

The screenshot shows the 'General' tab of the '1756-EN2TR Properties' dialog box. The 'Type' is set to '1756-EN2TR 1756 10/100 Mbps Ethernet Bridge, 2-Port, Twisted-Pair Media'. The 'Vendor' is 'Allen-Bradley' and the 'Parent' is 'Local'. The 'Name' is 'local_enet'. The 'Description' field is empty. The 'Ethernet Address' section has three radio buttons: 'Private Network' (192.168.1.), 'IP Address' (192.168.101.122), and 'Host Name'. The 'Slot' is set to '1'. The 'Module Definition' section shows 'Revision: 10.7', 'Electronic Keying: Compatible Module', 'Connection: None', and 'Time Sync Connection: None'. The 'Status' at the bottom is 'Offline'. Buttons for 'OK', 'Cancel', 'Apply', and 'Help' are at the bottom right.

Figure 5-A
1756-EN2TR Properties – General Tab

Verify the following configuration settings:

Type: Match actual module's Part Number

Parent: Local – Module in the same chassis as processor

Name: Module name – user defined

IP Address: Must match to module's actual IP address

If address does not match change either module's IP address to match the IP Address setting on General tab or change the IP Address setting on the General tab to match the actual IP address of the module.

Slot: Must match the actual slot location of module

Electronic Keying: Based in module's revision

7. Navigate back to I/O Configuration folder on the Controller Organizer window

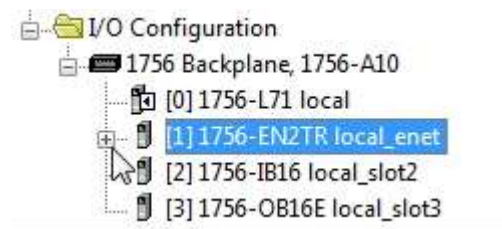


Figure 6-A

8. Click the plus (+) sign to the left of the local Ethernet module,

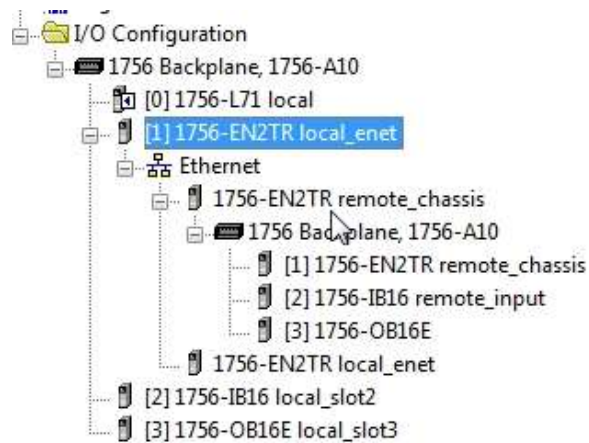


Figure 7-A

The information listed under [1] 1756-EN2TR local_enet is the configuration information for the remote chassis.

Remote Chassis (Backplane) is a 10-slot chassis – 1756-A10

In slot 1 of the remote chassis is the remote communication module –
[1] 1756-EN2TR remote chassis

In slot 2 of the remote chassis is a 16-point input module –
[2] 1756-IB16 remote input

In slot 3 of the remote chassis is a 16-point output module –
[3] 1756-OB16E

This information must match the modules' location in the remote chassis.

9. Right click [1] 1756-EN2TR remote chassis to open its Properties window

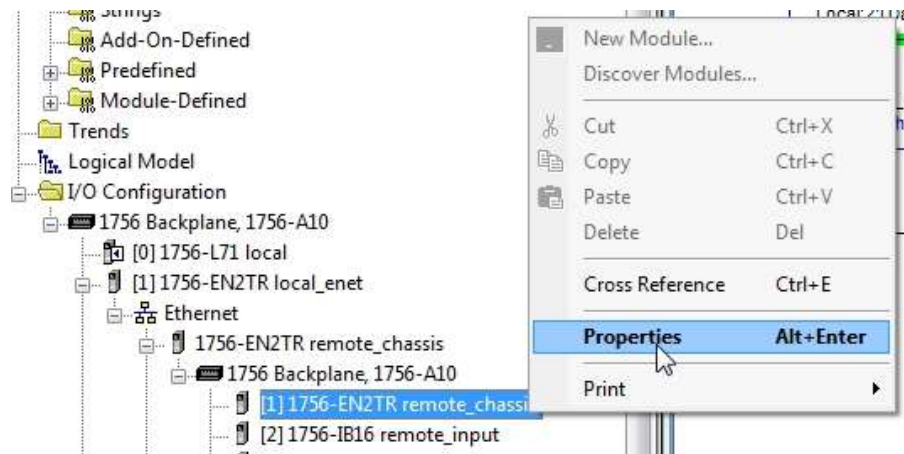


Figure 8-A

10. Navigate to General tab for [1] 1756-EN2TR remote chassis module.

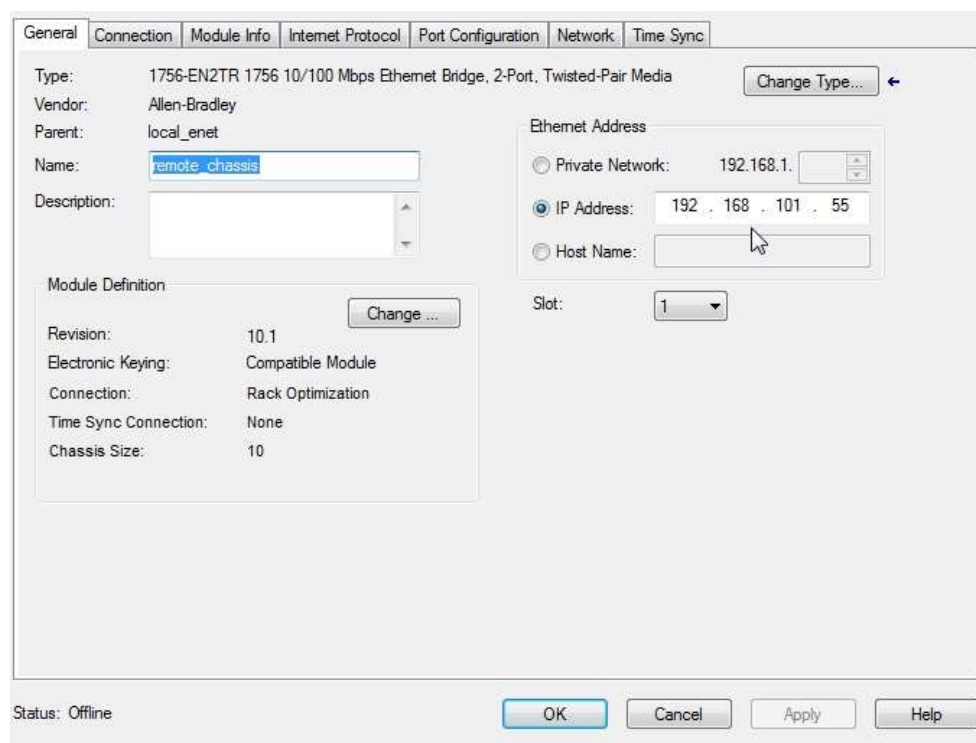


Figure 9-A Remote Ethernet Module's Properties Window – General Tab

Verify the following configuration settings:

Type: Match actual module's Part Number

Parent: local_enet – Name of the Ethernet Communication module in the local chassis

Name: Module name – user defined

IP Address: Must match to module's actual IP address

If address does not match change either module's IP address to match the IP Address setting on General tab or change the IP Address setting on the General tab to match the actual IP address of the module.

Slot: Must match the actual slot location of module

Electronic Keying: Based in module's revision

Chassis Size: Number of Slots in Remote Chassis – must match to actual chassis size

Use Change button to modify Chassis Size, Revision and Electronic Keying settings

11. Navigate back to the Controller Organizer window and open Controller Tags window.



Figure 10-A – Controller Tags

12. View Controller Tag window.

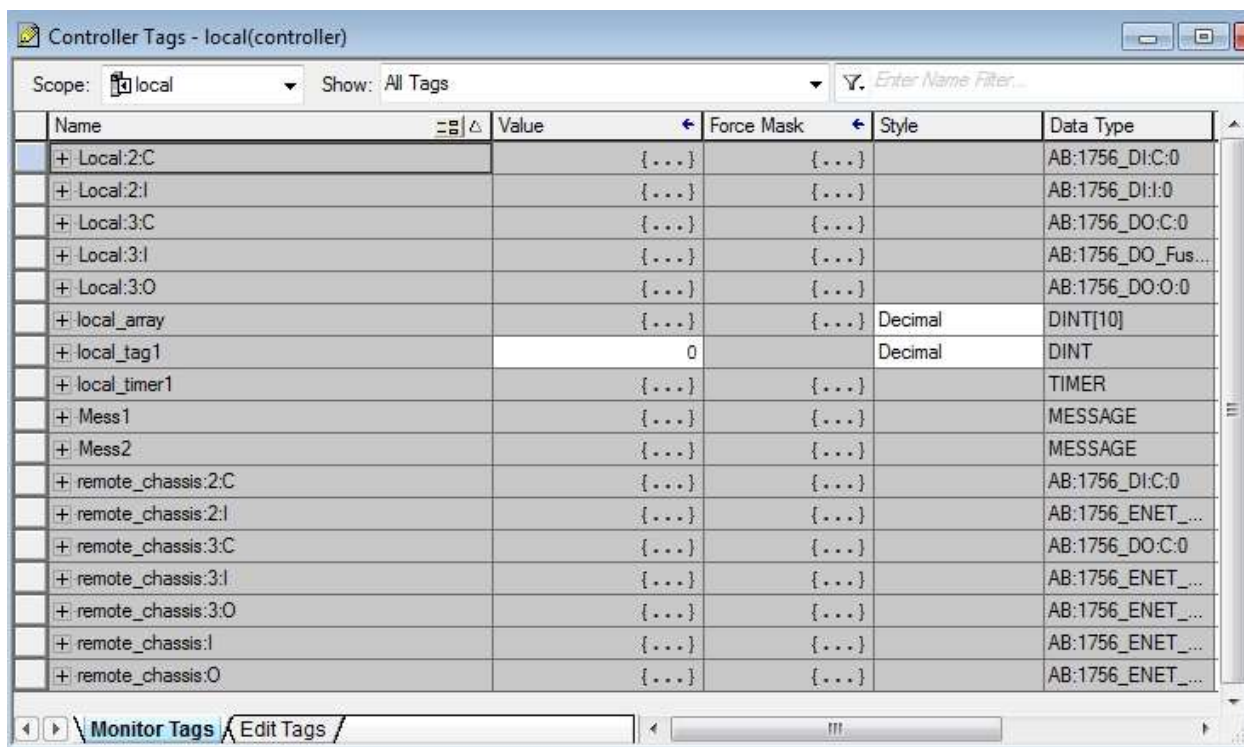


Figure 11-A –Controller Tags

Tags that begin with the term Local are I/O tags for I/O modules located in the Local Chassis.

Tags that begin with the term remote_chassis are I/O tags for I/O modules located in a Remote Chassis.

What is the Name of the 1756-EN2TR Ethernet module located in the Remote Chassis?

Note: I/O tags for remote chassis I/O modules begin with the Name of the communication module in the Remote Chassis.

For example – remote_chassis:2:I tags – refers to the input module in slot 2 of the remote chassis.

remote_chassis:3:O tags – refers to the output module in slot 3 of the remote chassis.

13. Navigate to the Ladder Logic screen – MainRoutine.



Figure 12-A – Ladder Logic Window

Rung 0 – PB1 on Local demo board will turn ON PL3 indicator on the Local demo board and PL7 on the Remote demo board.

Rung 1 – SS4 on Local demo board will turn ON PL3 indicator on the Remote demo board

Rung 2 – SS5 on Remote demo board will turn ON PL0 indicator on the Local demo board

14. Make any necessary changes to Ethernet Modules Properties windows - General tabs
Download the Project File Module_2_Remote_Chassis.ACD to 1756-L71 processor
Verify correct operation.

Note: To add additional chassis to the I/O Configuration – Right click the local Ethernet module and choose New Module.

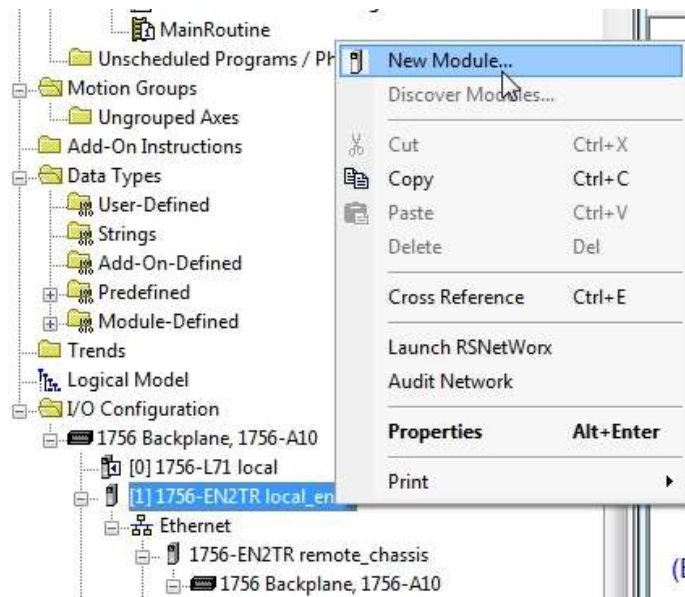


Figure 13-A

On the Select Module Type window – Select the type of communication module that will be located in the remote device.

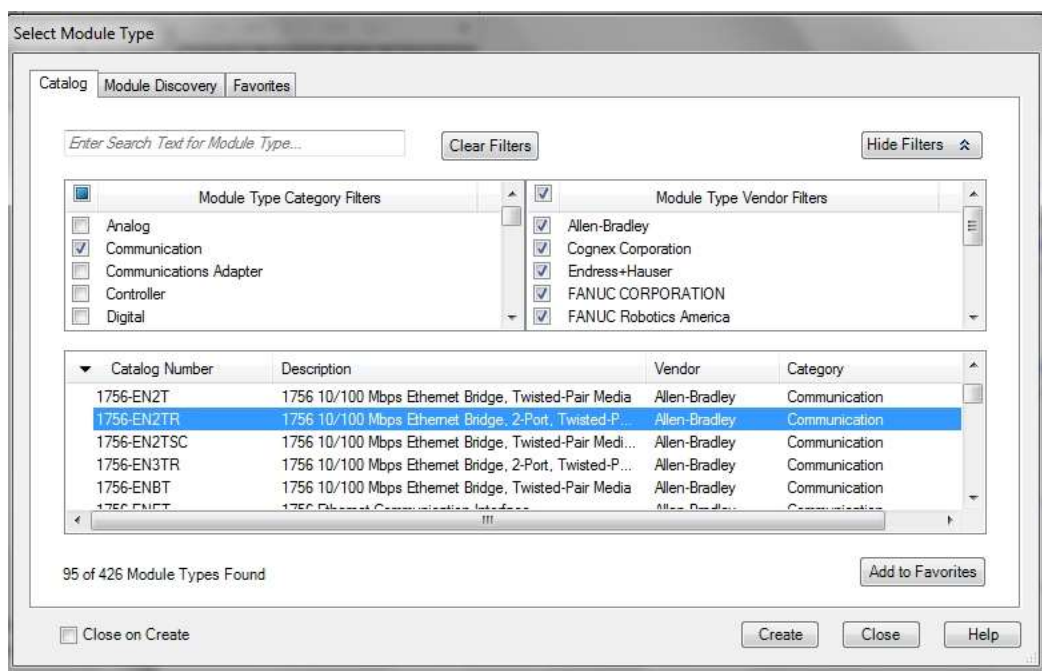


Figure 14-A

Note: To add additional modules a Remote Chassis – Right click the remote Ethernet module (located in Remote Chassis) and choose New Module.

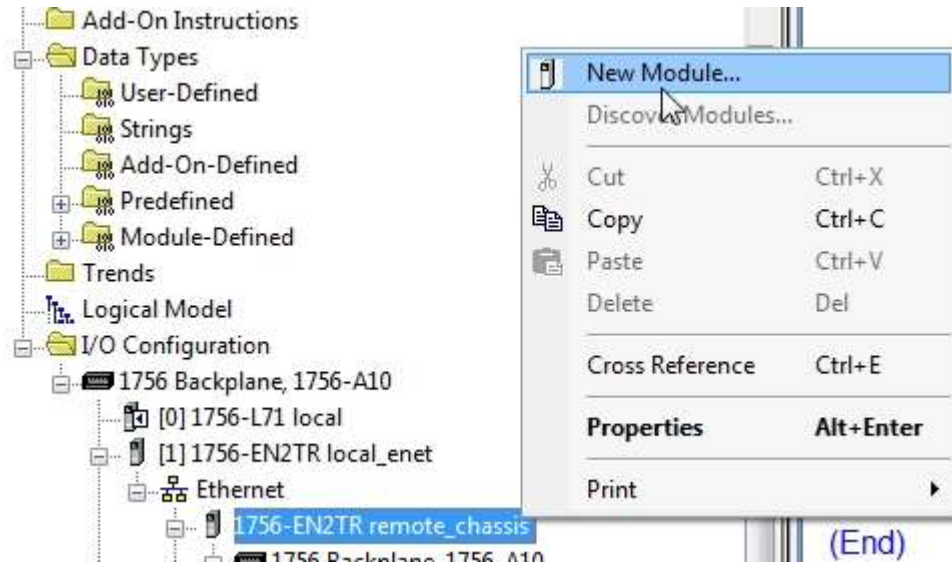


Figure 15-A

On the Select Module Type window – Select the type of I/O module that will be located in the remote chassis.

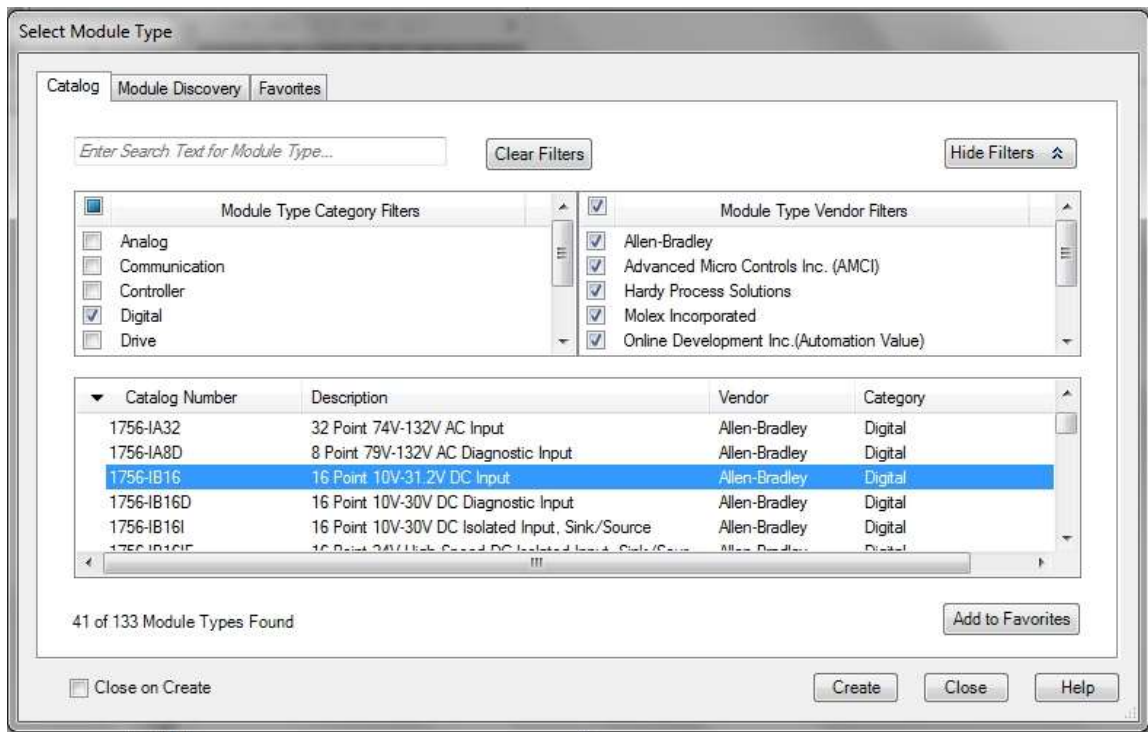


Figure 16-A

Adding I/O Module to Remote Chassis.

Review Questions

1. T F Remote Chassis must be connected using Ethernet.

2. The communication module must be located in what slot of a chassis?
 - a) 6
 - b) Right most slot
 - c) 0
 - d) Doesn't matter

3. A communication module in a remote chassis is named – Machine_1, I/O tags in the chassis will be named:
 - a) Remote_Chassis:
 - b) Local:
 - c) Machine_1:
 - d) It depends on module address

4. A tag called LINE6:4:I.Data.3 is being used. Where is the module located.
 - a) A Local Chassis, Slot 6
 - b) A Remote chassis, Slot 6
 - c) A Remote chassis, Slot 4
 - d) A Remote chassis, Slot 3

5. A tag called LINE6:4:I.Data.3 is being used. What module terminal is being referenced?
 - a) 6
 - b) 4
 - c) 3
 - d) 1

6. T F A remote chassis does not require a processor.

7. A tag called LINE6:4:I.Data.3 is being used. What type of data is being referenced?
- a) Analog Input
 - b) Analog Output
 - c) Discrete Input
 - d) Discrete Output
8. The processor I/O Fault has does not reference remote I/O modules:
- a) True
 - b) False

The outcomes of this exercise (listed on page 1) specifies the skills that the Student must demonstrate to the Instructor. Once the Instructor is satisfied with the demonstration of Knowledge & Skills by the individual student, they will sign this document (for the student), then enter a 100% into the Hands-On Lab grade in Sakai.

I verify that this student has completed all of the requirements of this Hands-On Assessment:

Student Name: _____

Faculty Signature: _____ Date: _____

DOL DISCLAIMER:

This product was funded by a grant awarded by the U.S. Department of Labor's Employment and Training Administration. The product was created by the grantee and does not necessarily reflect the official position of the U.S. Department of Labor. The Department of Labor makes no guarantees, warranties, or assurances of any kind, express or implied, with respect to such information, including any information on linked sites and including, but not limited to, accuracy of the information or its completeness, timeliness, usefulness, adequacy, continued availability, or ownership.



This work is licensed under a [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/).